





# PCE-SERIES

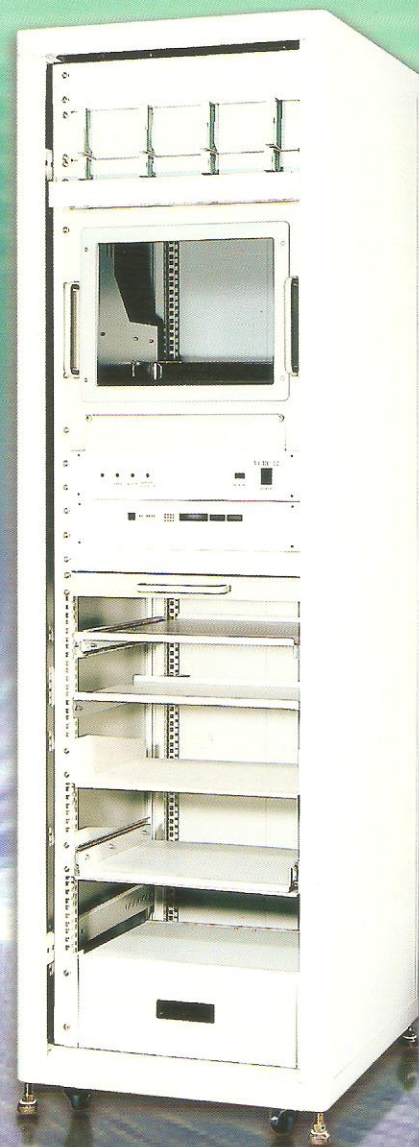

上抽風扇組(4顆) Four Fans Top Tray

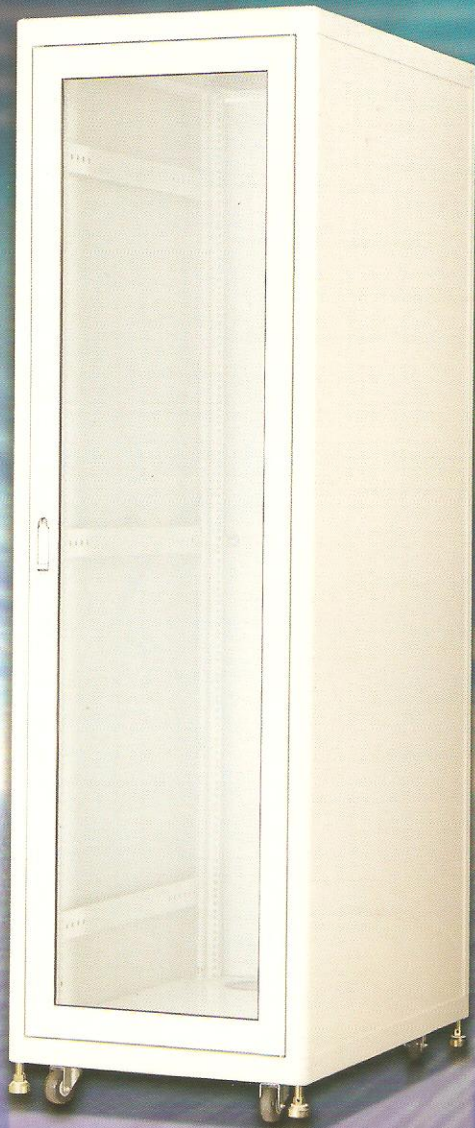

上抽風扇組(2顆) Two Fans Top Tray



上走線蓋板 / 風扇組 Wiring Top



鋁框散熱網門組  
Mesh Door

鋁框壓克力門組  
Acrylic Front Door


可拆式側板  
Removable Side Panel

固定式側板  
Fixed Side Panel

主體  
Main Frame

標準後門組  
Standard Rear Door


鋁框散熱網門組  
Mesh Door



通風率40% (Perforated Area up to 40%)

### 產品特色 / Features of PCE

- 依據ANSI/EIA-RS-310-C, ANSI/EIA-RS-310-D標準製造。  
The pitch of mount holes、inner width are followed up the ANSI/EIA-RS-310-D Standard.
- 通過UL、CE安全認證, MIL-STD-167震動測試合格, ISO 9001品質認證。  
Quality approved by the criteria of UL、CE, and the vibration test, according to the MIL-STD-167; Quality system carried out under the guidelines of ISO 9001.
- 機櫃框體由“三向接頭”、框結構鋁柱及主鋁柱於X、Y、Z軸上以M8螺絲(2顆)相互緊密結合而成, 並通過1000KG載重測試合格。  
The cabinet jointed with diagonal die-casting corners、top frame、bottom frame and main posts by screws(M8)along X、Y、Z axiels respectively, the certificate of loading-rate up to 1000kgs(2200lbs).
- 定位軌上打有方型孔位(9.4mmX9.4mm), 依設備操作之需求, 可精準調整活動柱位置, 彈性使用內部空間。  
Side post contains square holes, 9.4x9.4mm pitch of 25.0mm of adjusting Moveable Mount Post.
- 機櫃表面處理方式為先經水洗、脫脂及鉻酸鹽處理後採用熱硬化粉體/液體塗裝方式烤漆。  
After pre-treatment, enclosures are coated through powder-painting process.
- M16之地平螺絲, 採用活動型底盤設計, 可調整機櫃水平, 調整時不會刮傷地板。  
For floor stand composed with rotated plinth, which support the weight of enclosure and prevent scraping the floor when adjusts the enclosure.
- 圓弧造型的設計, 外型美觀, 特殊的截面, 防止壓力集中, 防止變形。  
Round-shape appearance and state-of-the-art design prevent distortoion from stress effects.
- 鋁框散熱網門組採4mm孔徑設計, 通風率可達40%散熱效果佳。(可配合特殊需求, 增加通風率。)  
Mesh door is composed of AL extrusion frame and mesh sheet which formed by 4.0mm round holes. High efficiency of ventilation.
- 上、下蓋板採一段式或三段式設計, 可彈性調整走線空間。  
Three-segment bottom plates, presents the diversified cable access.

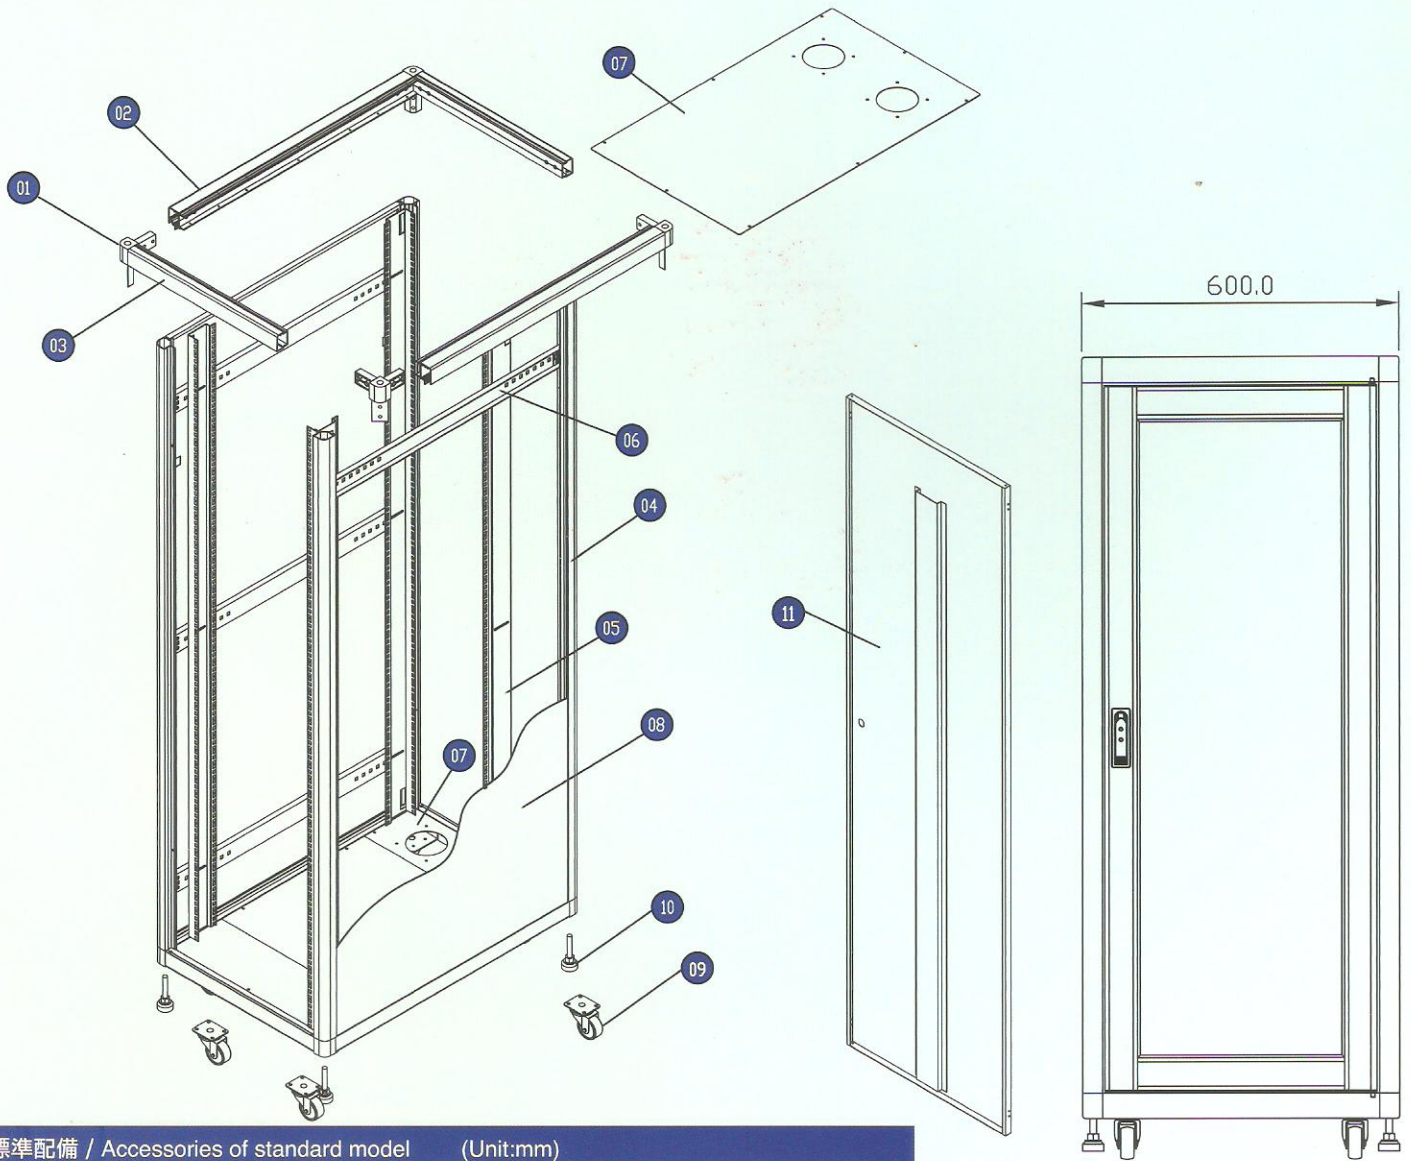


標準配備 / Accessories of standard model (Unit:mm)

項次No.	品名規格 Item	材質 Material	數量Q.ty.
01	三向接頭 3D die-casting corner	鋁合金 AL. (ADC 12)	8
02	框結構鋁柱 Frame member(A)	鋁合金 AL. (A6063 T5)	4
03	框結構鋁柱 Frame member(B)	鋁合金 AL. (A6063 T5)	4
04	主鋁柱 Main post	鋁合金 AL. (A6063 T5)	4
05	活動柱 Moveable mounting post	Sphc ,t=2.0mm	4
06	定位軌 Horizontal Strut	Sphc ,t=2.0mm	4/6
07	上(下)蓋板 Top(Bottom) Plate	Spcc ,t=1.6mm	配滿 (Filled)
08	固定式側板 Fixed Side Panel	Spcc ,t=1.2mm	2
09	2.5"活動輪 Swivel Caster	P.U & Steel	4
10	地平螺絲 Floor Stand	Steel	4
11	後門組 Rear Door	Spcc ,t=1.0mm	1

ANSI/EIA-RS-310-D:

1U=1.75Inches=44.45mm

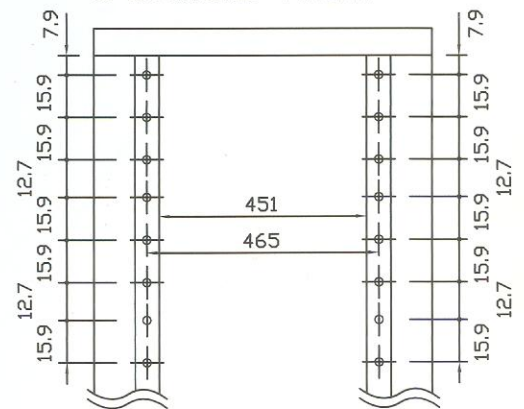


型號尺寸/Standard Size (Unit:mm)


型號 Model No.	外部寬度 External Width	前面板寬度 Panel Width (Center)	內緣寬度 Panel Width (Edge)	外部總高 (不含輪子) External Height	外部總高 (含輪子) External Height	內部可用高度 Usable Height	深度 Depth	U數 U
PCE-157560-19	600	483	451	765.0	842.0	669.0	750	15
PCE-307560-19	600	483	451	1432.0	1509.0	1336.0	750	30
PCE-357560-19	600	483	451	1654.0	1731.0	1558.0	750	35
PCE-359060-19	600	483	451	1654.0	1731.0	1558.0	900	35
PCE-417560-19	600	483	451	1921.0	1998.0	1825.0	750	41
PCE-419060-19	600	483	451	1921.0	1998.0	1825.0	900	41
PCE-4110060-19	600	483	451	1921.0	1998.0	1825.0	1000	41
PCE-4111060-19	600	483	451	1921.0	1998.0	1825.0	1100	41
* PCE-429060-19	600	483	451	1965.0	2042.5	1869.5	900	42
* PCE-4210060-19	600	483	451	1965.0	2042.5	1869.5	1000	42
* PCE-4211060-19	600	483	451	1965.0	2042.5	1869.5	1100	42

\* 為接單生產      ● 顏色：冷灰色/黑色 (41U, D:900mm以上)      ● 可接受其他尺寸/顏色訂製  
 \* By Order      ● Color: Cold Gray/Black      ● OEM Color and Dimensions are available


# ACCESSORIES




固定式面板 (Blank Panel)		
型號 Model No.	尺寸 Dimension	
BP-0119S	482	44x14.5mmx1.2t
BP-0219S	482	88x14.5mmx1.2t
BP-0319S	482	133x14.5mmx1.2t
BP-0419S	482	177x14.5mmx1.2t
BP-0519S	482	222x14.5mmx1.2t
BP-0619S	482	266x14.5mmx1.2t




1U理線槽 (1U Cable Channel)		
型號 Model No.	尺寸 Dimension	
KD-0119	19"	1Ux60mmx1.2t




支架 (Support Angle)		
型號 Model No.	尺寸 Dimension	
SA-4903	35x45	490mmx3t
SA-5403	35x45	540mmx3t
SA-6403	35x45	640mmx3t
SA-6903	35x45	695mmx3t
SA-4904	35x45	490mmx1.6t
SA-5404	35x45	540mmx1.6t
SA-6404	35x45	640mmx1.6t
SA-6904	35x45	695mmx1.6t




電源組 (Power Strip)		
型號 Model No.	尺寸 Dimension	
PS-1108	110V/8	插座
PS-2208	220V/8	插座




支撐板 (Shelf Plate)		
型號 Model No.	尺寸 Dimension	
SP-4519	458	450x14mmx3t
SP-5519	458	550x14mmx3t
SH-4519	458	450x14mmx2t
SH-5519	458	550x14mmx2t
SH-7019	458	700x14mmx2t




1U帶錶電源組 (1U Power Strip W/Meter)		
型號 Model No.	尺寸 Dimension	
PD-1108A	110V/8	插座
PD-2208A	220V/8	插座



2U承板 (2U Plate)		
型號 Model No.	尺寸 Dimension	
UP-4019	482	400x88mmx1.6t



上抽風扇組 (Top Fan Tray)			
型號 Model No.	數量 QTY	備註 Remark	
FU-1102A	2	110V	
FU-1104A	4	110V	
FU-1106A	6	110V	
FU-2202A	2	220V	
FU-2204A	4	220V	
FU-2206A	6	220V	



可調式支撐板 (Adjustable Vented-Shelf)		
型號 Model No.	尺寸 Dimension	
AP-5519	482	550x45mmx1.0t
AP-7019	482	700x45mmx1.0t



螺絲 (Screws)				
型號	尺寸	材質	處理	備註
SC-0501	M5	鐵材	電鍍	面板螺絲
SC-0502	M5	鐵材	電鍍	支架螺絲
SC-0503	M5	鐵材	電鍍	抓住螺帽(M5)
SC-0603	M6	鐵材	電鍍	抓住螺帽(M6)



抽拉式工作台 (Slide Shelf)		
型號 Model No.	尺寸 Dimension	
DT-4019	400	482x45mmx1.6t
DT-5519	550	482x45mmx1.6t



抽屜 (Drawer Unit)		
型號 Model No.	尺寸 Dimension	
DU-4019	482	400x177mmx1.2t